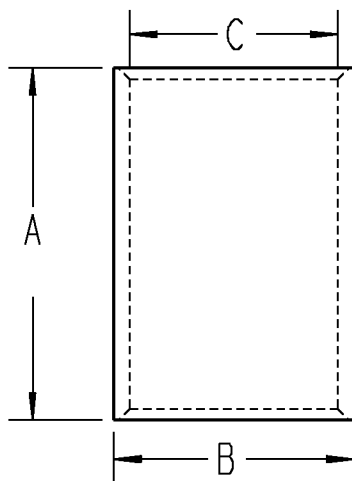


**T&B Sta-Kon**

MATERIAL: TIN-PLATED COPPER

RANGE: 22AWG TO 500 MCM

TOOLS:

A, B AND C SERIES : ERG2002, WT110M

WT111M, WT2000

D SERIES: WT-115A, TBM8-750MI

TBM8-750BSCR

E SERIES: TBM8-750MI, TBM8-750BSCR

ERG2008 (6 AWG DIE)

F THRU R SERIES: TBM8-750MI

TBM8-750BSCR

ALL DIMENSIONS ARE APPROXIMATE, FOR REFERENCE ONLY.

CAT NUMBER	WIRE RANGE		CIR MIL RANGE	LENGTH A	O.D. B	I.D. C
	MIN.	MAX.				
A18-PS-M	2#22	1#22, 1#16	509-3,260	0.314	0.129	0.086
B14-PS-M	2#20	1#14, 1#20	2,050-5,180	0.315	0.155	0.113
C10-PS-D	2#16	1#10, 1#16	5,180-13,100	0.380	0.220	0.170
D8-PS-D	1#10, 1#14	2#10	13,100-20,800	0.375	0.260	0.180
E6-PS-D	2#10, 1#14	2#10, 3#14	20,800-33,100	0.500	0.365	0.266
F4-PS-W	2#8, 1#14	2#6	33,100-52,600	0.531	0.410	0.302
G2-PS-W	3#8, 1#14	2#4	52,600-83,700	0.640	0.521	0.396
H1/0-PS-C	6#8	2#4, 1#6	83,700-119,500	0.750	0.571	0.446
J2/0-PS-C	3#4	1#1, 1#2	119,500-150,500	0.750	0.632	0.507
K3/0-PS-L	4#4	2#1, 2#10	150,500-190,000	0.750	0.701	0.564
L4/0-PS-L	3#2	1#1/0, 3#4	190,000-231,100	0.770	0.766	0.629
M250-PS-Q	1#3/0, 4#8	1#3/0, 8#8	231,100-300,000	1.063	0.926	0.749
N300-PS-X	1#2/0, 4#4	1#300MCM, 3#6	300,000-380,000	1.125	1.100	0.882
P400-PS-X	1#250MCM, 5#6	1#4/0, 4#2	380,000-478,000	1.250	1.200	0.956
R500-PS-V	1#400MCM, 3#6	1#250MCM, 13#6	478,000-600,000	1.438	1.330	1.060

**GENERAL NOTES**

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

**REVISIONS**

2. SEE ERN ( 2007805 ) FOR APPROVAL SIGNATURES & RELEASE DATE.  
PROJECT NO: TM401341

**Thomas & Betts**  
www.tnb.com

DESCRIPTION:

**STA-KON  
PARALLEL SPLICES**

ORIGINAL PROJECT NO / ( ERN NO )

TM401330 / ( 2006308 )

SHEET NO:

1 OF 1

REV. NO:

2

DRAWING NO:

WSD-000229

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEViate FROM ANY OF THE DETAILS SHOWN HEREON.

©2006 Thomas &amp; Betts - Proprietary. All Rights Reserved